

LED lighting for use in terraristics

Light data	Reptile 750	Reptile 1150
Light source	LED	LED
Luminous flux	1900 lm	3280 lm
Color temperature	8000 K	7700 K
Color rendering index	91.1	90.3
Beam angle	100°	100°
PPF	26,0 µmol/s	43.3 µmol/s
UVA power	768 mW	975 mW
Installed LED types	6500K UVA RGB	6500K UVA RGB
PstLM ¹⁾	0.03	0.02
SVM ¹⁾	0.00	0.00
Energy efficiency class ²⁾	-	-
Dimmable ³⁾	Yes	Yes

¹⁾ When using the following DRV2: DRV2 36W Item No.: 00012991

DRV2 48W Item No.: 00012992



²⁾ Not required as the lights have a UV radiation > 2mW/km and are intended for use in terraristics.

³⁾ Controllable via the separately available SolarStinger CON1 (Item No.: 00011561)

Electrical data	Reptile 750	Reptile 1150
Voltage	24 V DC	24 V DC
Power	27 W	41 W

Operating conditions	Reptile 750	Reptile 1150
Ambient temperature	-10...+40 °C	-10...+40 °C
Type of protection	IP65	IP65

General information	Reptile 750	Reptile 1150
Item No.:	00013698	00013699
Weight	600 g	870 g
Length	750 mm	1150 mm
Width	49 mm	49 mm
Height	15 mm	15 mm
Color	schwarz	schwarz
Cable length	1,9 m	1,9 m

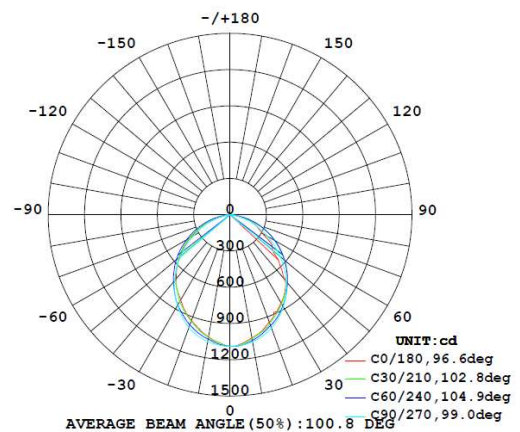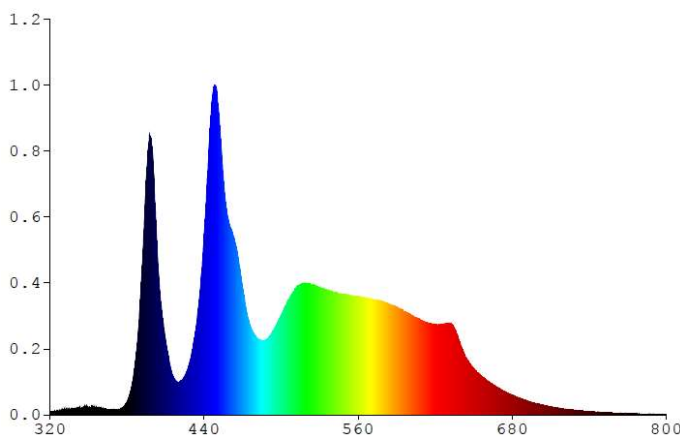

Power supplies	Reptile 750	Reptile 1150
DRV2 24W Item No.: 00012990	-	-
DRV2 36W Item No.: 00012991	✓	-
DRV2 48W Item No.: 00012992	✓	✓
DRV2 Set 60W Item No.: 00013503	✓	✓
DRV2 Set 90W Item No.: 00013228	✓	✓
DRV2 Set 120W Item No.: 00013229	✓	✓
DRV2 Set 160W Item No.: 00013230	✓	✓

Control unit



CON1

Item No.: 00011561

Y-Cable *



Y-Kabel (2x outlet)

Item No.: 00011553



Y-Kabel (4x outlet)

Item No.: 00011959

* Distribution cable for connecting up to 2 or 4 SunStrips to a DRV.

Holder *



Flat-Holder

Item No.: 00013702



Z-Holder

Item No.: 00013703



Bridge-Holder

Item No.: 00013704



Plate-Holder

Item No.: 00013705



Universal Stand

Item No.: 00013706

* The holders from the previous series can also be used